



www.ascendor.at

PLATFORM STAIRLIFT
PANORAMA LIFT
ENCLOSED ELEVATOR
VERTICAL PLATFORM LIFT

ascendor[®]
LIFTTECHNIK




EASY
HOME



FASTENER GUIDELINES

PLATFORM STAIRLIFT

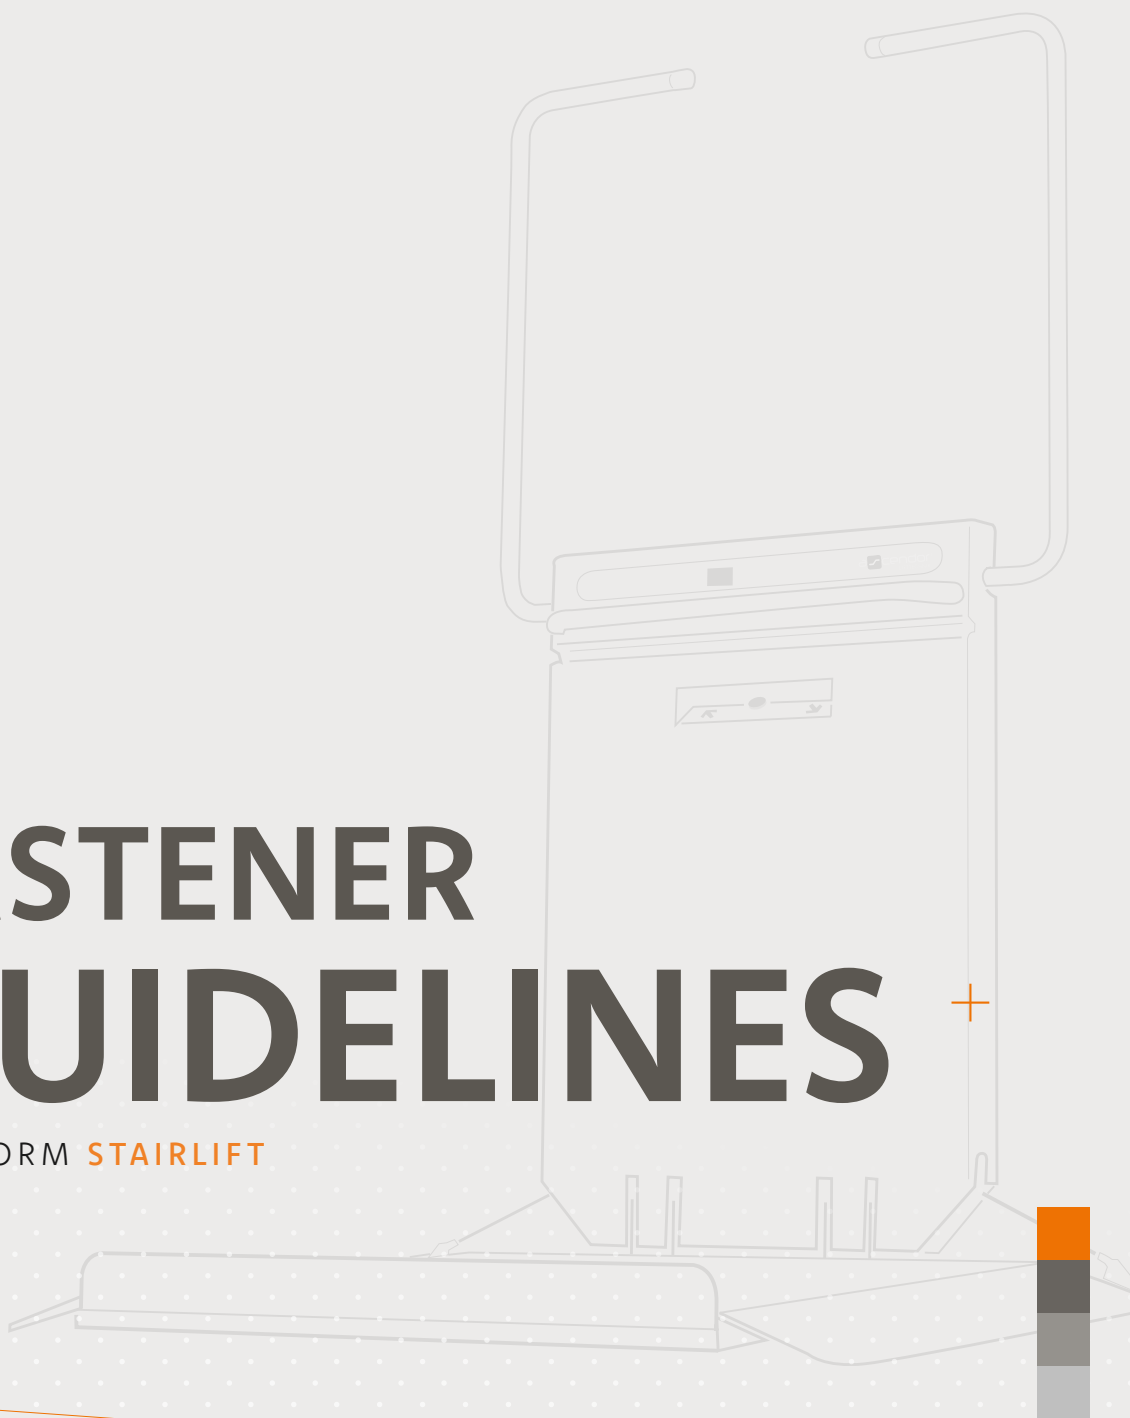



EASY
ASSEMBLY

SELECT THE WALL MATERIAL

PLATFORM STAIRLIFT



BRICK



CONCRETE



AERATED
CONCRETE



NATURAL
STONE
/ TERRAZZO



WOOD



STEEL



ADHESIVE
ANCHORING



ADDITIONAL
MATERIAL



PRICE
LIST






FASTENER EASY ASSEMBLY SELECTION

PLATFORM STAIRLIFT



Hex-head coach screw M12x120 with wall plug

Length	120 mm
Fastener head type	hexagonal
Material	hot-dipped galvanised steel
Hole diameter	14 mm
Screw drive size	SW19
Quantity per unit	50 pieces
Minimum edge distance	100 mm



Hex-head coach screw inox-steel M12x120 with wall plug

Length	120 mm
Fastener head type	hexagonal
Material	stainless steel A2
Hole diameter	14 mm
Screw drive size	SW19
Quantity per unit	50 pieces
Minimum edge distance	100 mm





FASTENER EASY ASSEMBLY SELECTION

PLATFORM STAIRLIFT

SPAX M10x160 with wall plug

Length 160 mm

Fastener head type flat countersunk, torx


Material electro-galvanised steel

Hole diameter 12 mm

Screw drive size TX40

Quantity per unit 50 pieces

Minimum edge distance 100 mm



1x





FOR EASY ASSEMBLY HONEYCOMB BRICKS

PLATFORM STAIRLIFT WALL DEPTH 25CM

⊕ (IMPORTANT: Do NOT use impact drill!)


Hex-head screw M14x160 with long-shaft wall plug

Length	160 mm
Fastener head type	hexagonal with flange
Material	electro-galvanised steel
Hole diameter	14 mm
Screw drive size	SW17 or TX50
Quantity per unit	50 pieces
Minimum edge distance	100 mm



Hex-head inox-steel screw M14x160 with long-shaft wall plug

Length	160 mm
Fastener head type	hexagonal with flange
Material	stainless steel A4
Hole diameter	14 mm
Screw drive size	SW17 or TX50
Quantity per unit	50 pieces
Minimum edge distance	100 mm

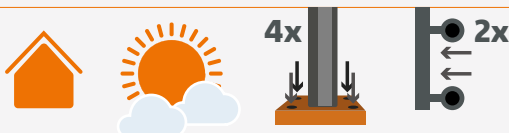




FOR EASY ASSEMBLY HONEYCOMB BRICKS

PLATFORM STAIRLIFT WALL DEPTH 25CM

⊕ (IMPORTANT: Do NOT use impact drill!)

SPAX M14x160 with long-shaft wall plug

Length	160 mm
Fastener head type	flat countersunk, torx
Material	electro-galvanised steel
Hole diameter	14 mm
Screw drive size	TX50
Quantity per unit	50 pieces
Minimum edge distance	100 mm

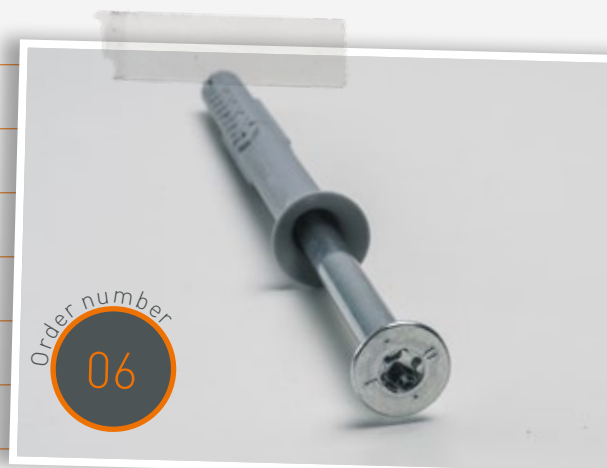

SPAX M14x160 with long-shaft wall plug inox steel

Length	160 mm
Fastener head type	flat countersunk, torx
Material	stainless steel A4
Hole diameter	14 mm
Screw drive size	TX50
Quantity per unit	50 pieces
Minimum edge distance	100 mm





FOR EASY ASSEMBLY HONEYCOMB BRICKS

PLATFORM STAIRLIFT WALL DEPTH 25CM

⊕ (IMPORTANT: Do NOT use impact drill!)

Hex-head screw M14x120 with long-shaft wall plug

Length 160 mm

Fastener head type hexagonal with flange


Material electro-galvanised steel

Hole diameter 14 mm

Screw drive size SW17 or TX50

Quantity per unit 50 pieces

Minimum edge distance 100 mm

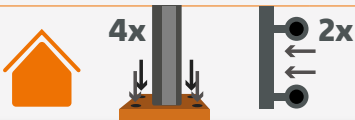

Hex-head inox-steel screw M14x120 with long-shaft wall plug

Length 120 mm

Fastener head type hexagonal with flange


Material stainless steel A4

Hole diameter 14 mm

Screw drive size SW17 or TX50

Quantity per unit 50 pieces

Minimum edge distance 100 mm

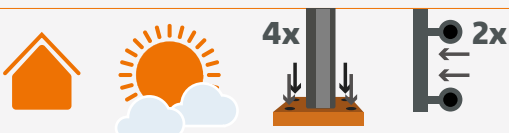



FOR EASY ASSEMBLY CONCRETE/STONE/ TERRAZZO

PLATFORM STAIRLIFT

Hex-head flanged M10x110 screw anchor

Length 110 mm

Fastener head type hexagonal with flange


Material hot-dipped galvanised steel

Hole diameter 10 mm

Screw drive size SW15

Quantity per unit 50 pieces

Minimum edge distance 40 mm

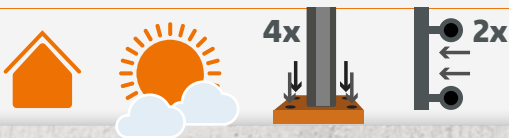

IMPACT WRENCH necessary

Hex-head flanged M10x115 screw anchor

Length 115 mm

Fastener head type hexagonal with flange



Material stainless steel A4

Hole diameter 10 mm

Screw drive size SW15

Quantity per unit 50 pieces

Minimum edge distance 40 mm

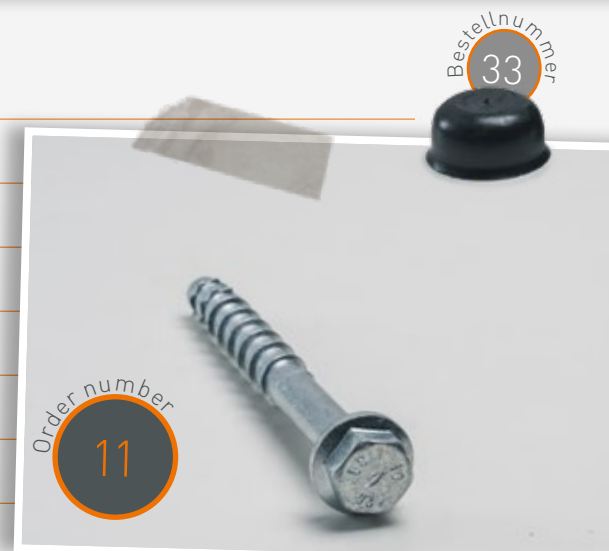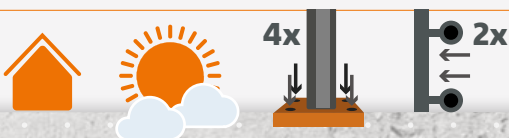

IMPACT WRENCH necessary




FOR EASY ASSEMBLY CONCRETE

PLATFORM STAIRLIFT



SPAX countersunk screw anchor M10x100


Length	100 mm
Fastener head type	flat countersunk, torx
Material	electro-galvanised steel
Hole diameter	10 mm
Screw drive size	TX50
Quantity per unit	50 pieces
Minimum edge distance	40 mm



IMPACT WRENCH necessary

SPAX countersunk inox-steel screw anchor M10x105

Length	105 mm
Fastener head type	flat countersunk, torx
Material	stainless steel A4
Hole diameter	10 mm
Screw drive size	TX50
Quantity per unit	50 pieces
Minimum edge distance	40 mm



IMPACT WRENCH necessary





FOR EASY ASSEMBLY CONCRETE

PLATFORM STAIRLIFT





Wedge anchor M10x113 with nut & washer

Length	113 mm
Fastener head type	hexagonal
Material	hot-dipped galvanised steel
Hole diameter	10 mm
Screw drive size	SW17
Quantity per unit	40 pieces
Minimum edge distance	100 mm



Wedge anchor inox-steel M10x110 with nut & washer

Length	110 mm
Fastener head type	hexagonal
Material	stainless steel A4
Hole diameter	10 mm
Screw drive size	SW17
Quantity per unit	40 pieces
Minimum edge distance	100 mm





FOR EASY ASSEMBLY WOOD

PLATFORM STAIRLIFT




Masonry bolt M12x120

Length	120 mm
Fastener head type	hexagonal flanged
Material	hot-dipped galvanised steel
Hole diameter	8 mm
Screw drive size	SW19
Quantity per unit	50 pieces



SPAX woodscrew M10x120

Length	120 mm
Fastener head type	flat countersunk, torx
Material	electro-galvanised steel
Hole diameter	6 mm
Screw drive size	TX40
Quantity per unit	50 pieces





BRICK | CONCRETE | AERATED | NATURAL STONE

EASY
ASSEMBLY

ADHESIVE ANCHORING

PLATFORM STAIRLIFT

Bestellnummer
32

Anchor rod, threaded M10x130 with nut&washer


Length 130 mm

Fastener head type hexagonal

Material hot-dipped galvanised steel

Screw drive size SW17

Quantity per unit 10 pieces

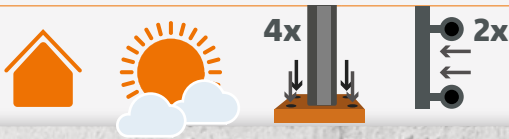

Anchor rod, threaded M10x130 with nut&washer


Length 130 mm

Fastener head type hexagonal

Material stainless steel A2

Screw drive size SW17

Quantity per unit 10 pieces

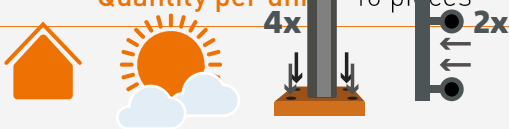

Ancho rod, threaded 1m

Length 1000 mm

Material stainless steel A2

Quantity per unit 1 piece





BRICK | CONCRETE | AERATED | NATURAL STONE

EASY
ASSEMBLY

ADHESIVE ANCHORING

PLATFORM STAIRLIFT




Hanger bolt with M10 internal thread

Length 150 mm

Fastener head type hexagonal

Material electro-galvanised steel

Quantity per unit 10 pieces





BRICK | CONCRETE | AERATED | NATURAL STONE

EASY
ASSEMBLY

ADHESIVE ANCHORING

PLATFORM STAIRLIFT



Mesh sleeve wall insert 16x130

Length 130 mm

Material plastic

Hole diameter 16 mm

Quantity per unit 20 pieces

For indoor and outdoor use



Injectable hybrid mortar (summer)

Content 300 ml

Application time at 20°C approx. 10 min

Setting time at 20°C approx. 60 min

Quantity per unit 1 cartridge

For indoor and outdoor use



Injectable hybrid mortar (winter)

Content 300 ml

Processing time at 0°C approx. 10 min

Cure time at 0°C approx. 120 min

Quantity per unit 1 cartridge

For indoor and outdoor use





FOR EASY ASSEMBLY STEEL

PLATFORM STAIRLIFT



Hex-head inox-steel bolt M10x30


Length 30 mm

Fastener head type hexagonal

Material stainless steel A2

Screw drive size SW17

Quantity per unit 50 pieces



Countersunk screw inox-steel M10x30


Length 30 mm

Fastener head type flat countersunk

Material stainless steel A2

Screw drive size 6 mm allen key

Quantity per unit 50 pieces





EASY
ASSEMBLY

ADDITIONAL MATERIAL

PLATFORM STAIRLIFT



Flat washer inox-steel M10

External diameter	22 mm
Internal diameter	10,5 mm
Thickness	2,4 mm
Material	stainless steel A2
Quantity per unit	10 pieces



Cap nut inox-steel M10

Hight	14 mm
Shape of head	hexagonal
Material	stainless steel A2
Screw drive size	SW17
Quantity per unit	50 pieces





EASY
ASSEMBLY

ADDITIONAL MATERIAL

PLATFORM STAIRLIFT



Round back T-nut ø30

Description

„Special part designed to improve visual appearance“

Material

stainless steel A2

Screw drive size

C-Spanner ø30

Quantity per unit

20 pieces





ADDITIONAL EASY ASSEMBLY MATERIAL

PLATFORM STAIRLIFT



Borehole cap 28-30mm

Material black plastic

Quantity per unit 10 pieces



Protective cap SW19

Material black plastic

Description cover for SW19 hex-head

Quantity per unit 50 pieces




Protective cap SW17

Material black plastic

Description cover for SW17 hex-head

Quantity per unit 50 pieces

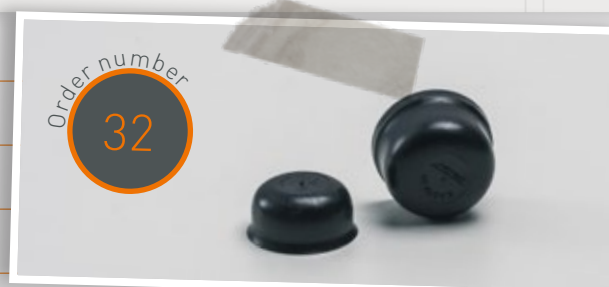


Protective cap SW15

Material black plastic

Description to fit over anchor screws

Quantity per unit 50 pieces

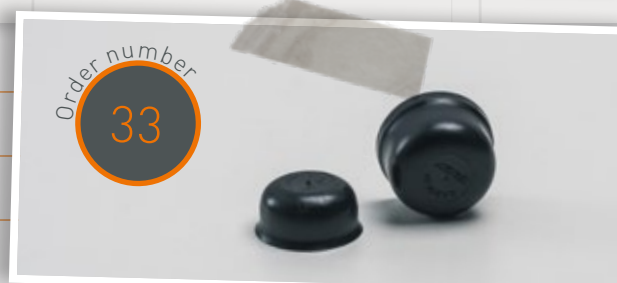

Protective cap SW16

Material black plastic

Description to fit over long shaft wall plugs

Quantity per unit 50 pieces





EASY ASSEMBLY PRICE LIST

 PLATFORM **STAIRLIFT**

order number	price per unit €
1	1
2	2
3	1,42
4	3,8
5	10,88
6	3,87
7	12,52
8	2,74
9	9,24
10	2,27
11	6,64
12	1,75
13	7,00
14	1,68
15	4,00
16	0,52
17	0,70
18	1,54
19	3,57
20	12,00
21	1,40
22	0,91
23	14,50
24	33,90
25	0,26
26	0,20
27	0,20
28	1,54
29	6,00
30	1,50
31	0,30
32	0,25
33	0,35
34	0,15

